


2 Zone Thermal Shock Test Chamber




Mobile phone scan
More product information


Energy Conservation

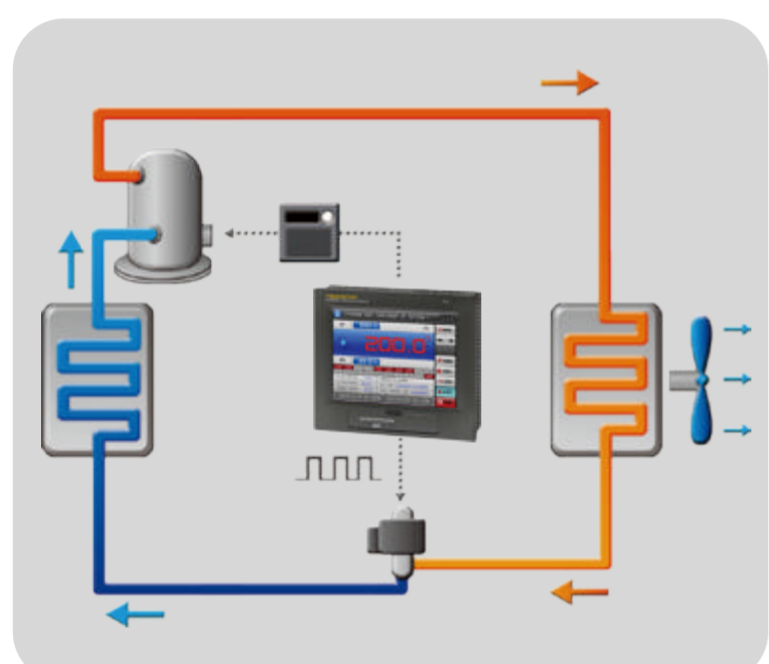

Remote network system

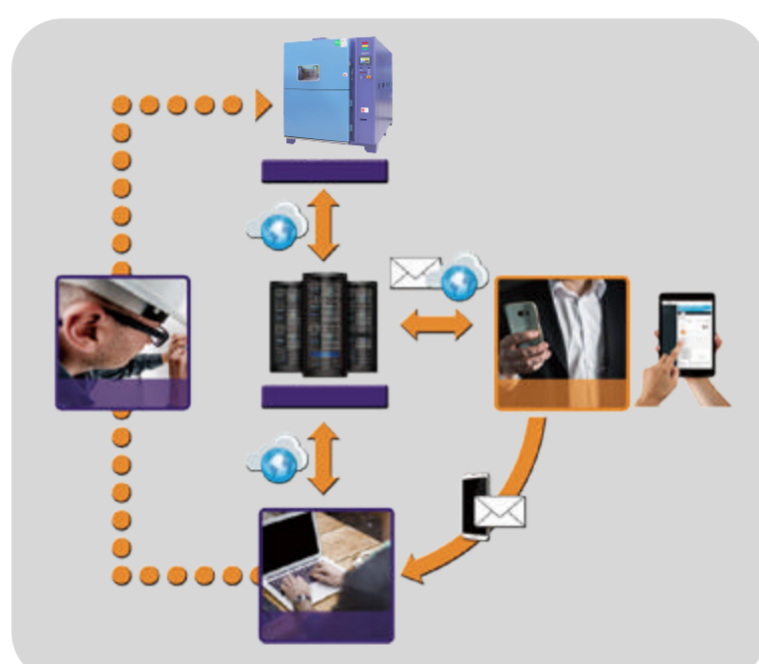

Circuit System

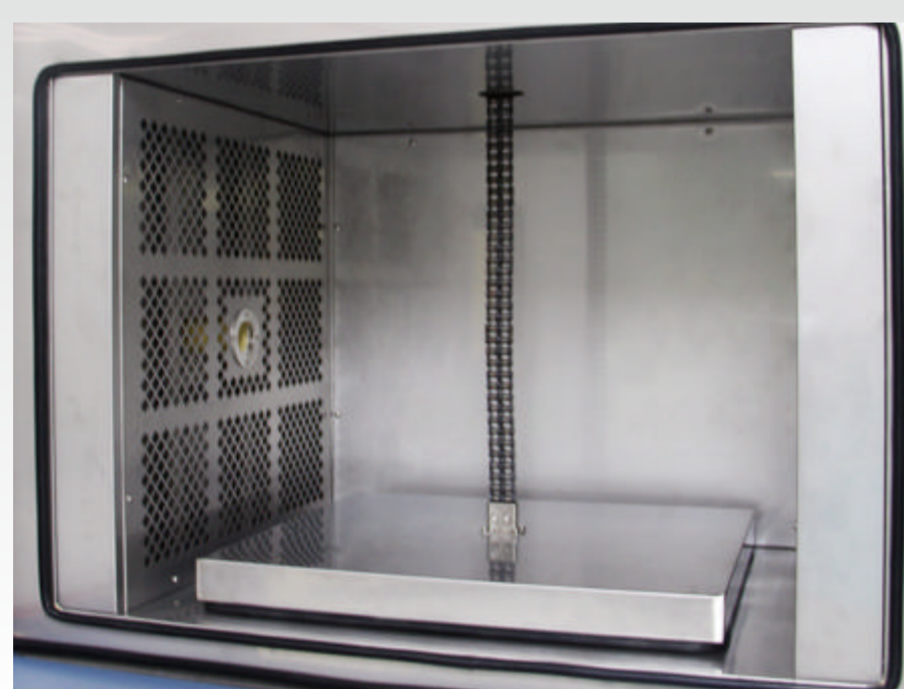

High Temperature Zone



Low Temperature Zone

● Specifications

Model	SM-50-2P-A	SM-80-2P-A	SM-100-2P-A	SM-150-2P-A	SM-200-2P-A	SM-300-2P-A	SM-500-2P-A
Temperature impact range	-65℃~150℃ (A:-45℃~150℃;B:-65℃~150℃;)						
Temperature fluctuation	±1.0℃						
Low temperature precooling time	25.0℃~-75.0℃ Within 60 mins 1.0~3.0℃/min						
High temperature preheating time	25.0℃~150.0℃ Within 45 mins 3.0~7.0℃/min						
Temperature conversion time	3s						
Temperature recovery time	Within 5 mins					Within 10 mins	
Internal material	Stainless steel(SUS304)						
External material	Cold rolled steel sheet / powder spraying						
Heat insulating material	100mm thickness polyurethane plate+10mm thickness mineral wool						
Fan	Centrifugal blower						
Compressor	fully closed or semi-closed		Environmental Test Chambers			semi-closed	
Condenser	Air cooling, water cooling						
Refrigerant	R404A、R23、R508						
Evaporator	Fin - and - Tube Heat Exchanger						
Heater	Nickel chromium alloy heating wire						
Interior size(mm) W*H*D	350*400*350	400*500*400	500*500*400	500*600*500	650*460*670	960*460*670	960*650*800
Outer size(mm) W*H*D	1100*1930*1460	1150*2130*1550	1250*2330*1550	1250*2530*1650	1400*2250*1850	1750*2250*1850	1750*2630*1980
Volume (L)	50L	80L	100L	150L	200L	300L	500L
Operating ambient temperature	+5 ~ 35℃						
Power supply	380V AC 50/60Hz						
Controller	SANWOOD SH5600:Equipped with RS232, RS485 port; (7.0 inch controller) USB data export						

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong
TEL: +86+769-81182799
FAX: +86+769-82987199
E-mail: info@sanwood.cc
www.sanwood.cc
www.climatic-chambers.com



Mobile phone scan
can visit our official website